



ASPHALT FLOAT



TRENCH BACKFILLING AND ASPHALT LEVELING

EASY TO USE

Patented system. E. Extremely easy to use on daily jobs. Can run with standard flow machine.

HUGE SAVINGS IN TIME AND COST

Up to 10 times faster than manual labor. In a cleaner, more consistent and safer manner.

SIMPLE DESIGN, EASY MAINTENANCE

The patented simple design is the key to a low maintenance attachment. Low maintenance means more working hours.

EASY TO CLEAN, LIGHT AND DURABLE



Designed without a limiting hopper. As soon as the asphalt is unloaded, the ST can spread it.



High speed and accuracy.



Adjustable mold board.

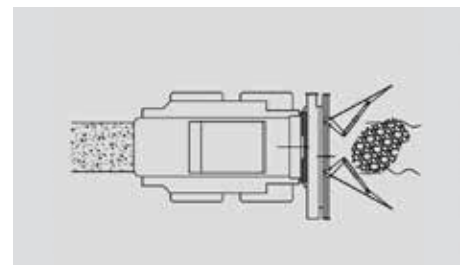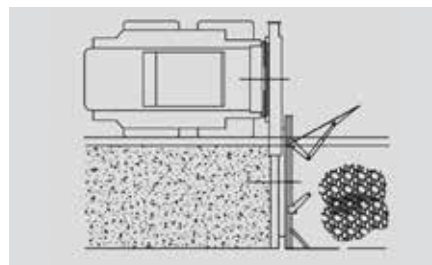

	ST 160B	ST 160	ST 200	
MIN. OPENING (Hyd, Adj.)	5	5	5	inch
MAX. OPENING (Hyd, Adj)	59	59	75	inch
SIDE SHIFT - HYDRAULIC	/	40	66	inch
MOLD BOARD ADJUSTMENT	0 - 4	0 - 4	0 - 4	inch
OPERATING WEIGHT (1)	1060	1250	1400	lbs

(1) User is responsible for ensuring that the equipment meets the prime mover's specifications and weight requirements.