




Patriot® 60WQ Down Hole Hammer

FEATURES

- Outdistances competitive hammers in both speed and longevity
- Simplified hammer design with less internal components
- Drills at high frequency to provide less vibration and smooth operation
- More efficient design requires less air which equals fuel savings
- Designed to operate at pressures up to 500 PSI (34.5 BAR)
- Ability to drill efficiently against high heads of water

AIR CONSUMPTION

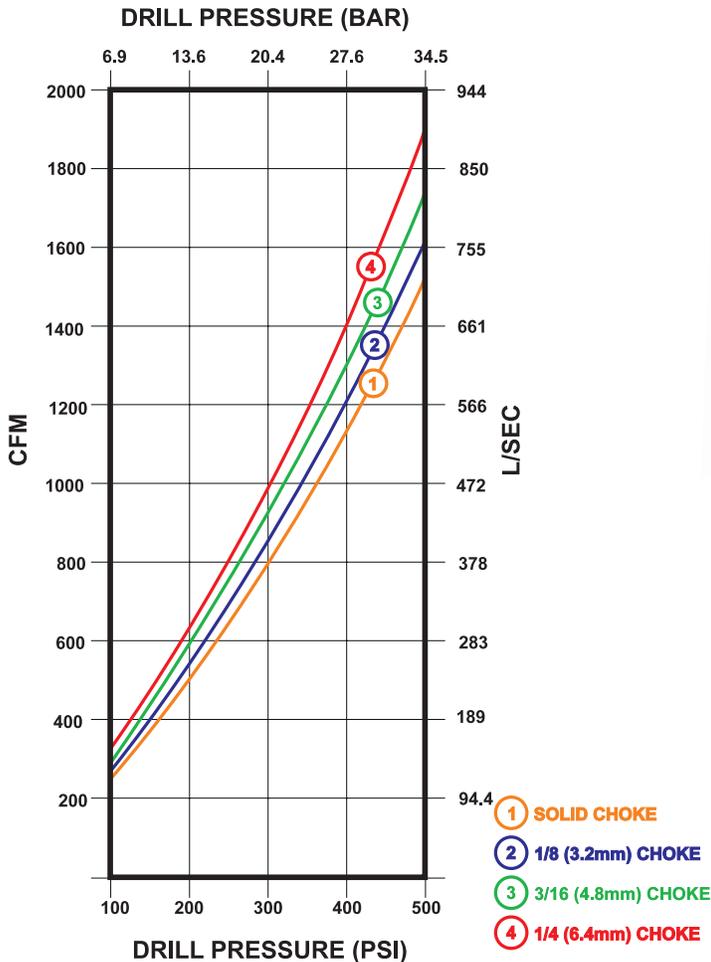

SPECIFICATIONS

Diameter	5-1/2"	140 mm
Bore	4-1/2"	114 mm
Stroke	4"	102 mm
Weight (Hammer only)	192 lbs	87 kg
Length (Shoulder to Shoulder)	41-3/16"	1046 mm
Length (Shoulder to Bit Face)	44-13/16"	1138 mm
A.P.I. Reg. Threads	3-1/2	

- 1800 blows per minute at 350 PSI (23.8 BAR)
- Drills holes from 6" to 8-1/2" (152 mm - 216 mm) in diameter
- Accepts QL60 bit shank

Down Hole Button Bits

Patriot® 60WQ



QL60 Bit Shank

DIAMETER
inches (millimeters)

WEIGHT*
pounds (kilograms)

FACES AVAILABLE

6"	(152 mm)	48 lbs.	(21 kg)
6-1/8"	(156 mm)	48 lbs.	(21 kg)
6-1/4"	(159 mm)	49 lbs.	(22 kg)
6-1/2"	(165 mm)	51 lbs.	(23 kg)
6-3/4"	(172 mm)	51 lbs.	(23 kg)
7"	(178 mm)	59 lbs.	(27 kg)
7-1/2"	(191 mm)	62 lbs.	(28 kg)
8"	(203 mm)	65 lbs.	(30 kg)
8-1/2"	(216 mm)	68 lbs.	(31 kg)

Concave



Convex



Flat



* Bit weights are approximate

FEATURES

- 5/8" (16 mm) diameter carbide buttons throughout face
- Chipways designed for faster hole cleaning
- Carbide buttons positioned for better fracture of rock providing faster penetration rates
- Several grades and types of carbide are available
- Other bit sizes may be available upon request

For More Information Contact:

Bob Lancaster
Northeast USA
Eastern Canada
(860) 933-1715

Ted Foust
Mid-Atlantic USA
(717) 579-7809

Carl Chidester
Appalachian USA
(304) 203-2408

Virginia Barron
Western USA
(325) 456-0695

Kris St. Onge
U.S. Construction
Western Canada
(860) 428-1543

Frank Gandar
Latin America
(325) 456-8553
(432) 360-6451

Chris Beare
EMEA - India
+44 (0) 7785-934-361

Andrew Robertson
EMEA - APAC
+44 (0) 77-489-72604

Ian Speer
Australia
+61 (0) 400 077 165